


BRASS METAL CABLE GLANDS

PRODUCT TYPE	SPECIAL SIZED BRASS CABLE GLAND
PRODUCT CODE	NKR-Ø
MANUFACTURER	MSM
MATERIAL	MS-58 BRASS
COATING	OPTIONAL NICKEL

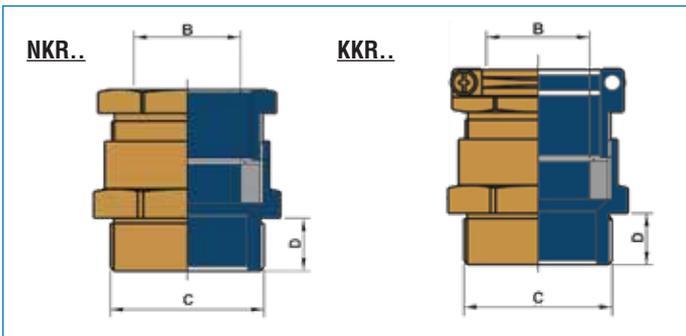

GENERAL FEATURES:

- * Threading norms; Metric EN 60423
NPT ANSI B1.20.1
GAS ISO 228
Pg DIN 46320
- * IP Protection class: IP 55 & IP 56
- * Standard Chloroprene Gaskets -40°C to +120°C,
- * Optional 316-316L stainless steel is also available.
- * It is of Standard Brass (MS-58) origin and nickel plating can also be made if desired.
- * Physical properties stated in the table have to be considered with ±5% tolerance.
- * If requested can be produced in any desired size or with a special thread length.

Usage Areas

Especially used in wet conditions (thanks to a covered gasket)



CERTIFICATES



OPTIONAL ACCESSORIES:

- * PVC Shroud,
- * Lock Nut,
- * Earth Tag,
- * IP Washer,
- * S. Steel Serrated Washer

BRASS METAL CABLE GLANDS

PRODUCT TYPE

SPECIAL SIZED BRASS CABLE GLAND

PRODUCT CODE

NKR-Ø

MANUFACTURER

MSM

MATERIAL

MS-58 BRASS

COATING

OPTIONAL NICKEL



NKR Type Code	Metric Size	Clamping Range "B" min-max (mm)	Hole Diameter "C" (mm)	Thread Length "D" (mm)
NKR-Ø25	Ø25	18÷24	32,0	10,0
NKR-Ø55	Ø55	43÷49	65,0	14,0
NKR-Ø60	Ø60	47÷54	70,0	18,0
NKR-Ø70	Ø70	55÷62	80,0	20,0
NKR-Ø80	Ø80	64÷72	90,0	20,0
NKR-Ø90	Ø90	74÷82	100,0	20,0
NKR-Ø100	Ø100	85÷92	110,0	21,0
NKR-Ø125	Ø125	92÷110	135,0	22,0
NKR-Ø150	Ø150	130÷150	170,0	30,0

KKR Type Code	Metric Size	Clamping Range "B" min-max (mm)	Hole Diameter "C" (mm)	Thread Length "D" (mm)
KKR-Ø25	Ø25	18÷24	32,0	10,0
KKR-Ø55	Ø55	43÷49	65,0	14,0
KKR-Ø60	Ø60	47÷54	70,0	18,0
KKR-Ø70	Ø70	55÷62	80,0	20,0
KKR-Ø80	Ø80	64÷72	90,0	20,0
KKR-Ø90	Ø90	74÷82	100,0	20,0
KKR-Ø100	Ø100	85÷92	110,0	21,0
KKR-Ø125	Ø125	92÷110	135,0	22,0
KKR-Ø150	Ø150	130÷150	170,0	30,0