


Polyamide Flexible Conduit

PRODUCT TYPE	Polyamide (PA6) Flexible Conduit	
PRODUCT CODE	PS..	
MANUFACTURER	MSM ENGINEERING	
MATERIAL	Polyamide PA6 V2	Operating Temperature: -40°C / +120°C
COLOR	GRAY - BLACK	

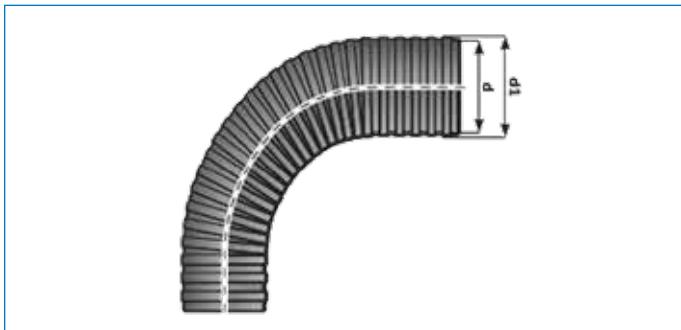

Gray Code	Black Code	Inside "d" Diameter (mm)	Outside "d1" Diameter (mm)	Bending Diameter Radius (R)	Meters Per Roll (mt)
PS-07	PS-07N	6,5	10,0	15,0	100
PS-08	PS-08N	8,5	12,0	15,0	100
PS-09	PS-09N	10,0	13,0	20,0	100
PS-11	PS-11N	12,0	16,0	30,0	100
PS-13	PS-13N	14,0	18,5	40,0	100
PS-16	PS-16N	17,0	21,5	45,0	50
PS-21	PS-21N	23,0	28,7	55,0	50
PS-29	PS-29N	29,0	34,5	65,0	25
PS-36	PS-36N	36,0	42,5	80,0	25
PS-48	PS-48N	48,0	54,5	95,0	25

Usage Areas

It is used in machine manufacturing, the automotive industry, safety systems, and in the connection of motors and other equipment. It is halogen-free and non-flammable. The black versions are resistant to ultraviolet light. It has high flexibility.