

BRASS METAL CABLE GLANDS

PRODUCT TYPE

NORMAL BRASS CABLE GLAND

PRODUCT CODE

NKR-..

MANUFACTURER


MSM

MATERIAL

MS-58 BRASS

COATING

OPTIONAL NICKEL

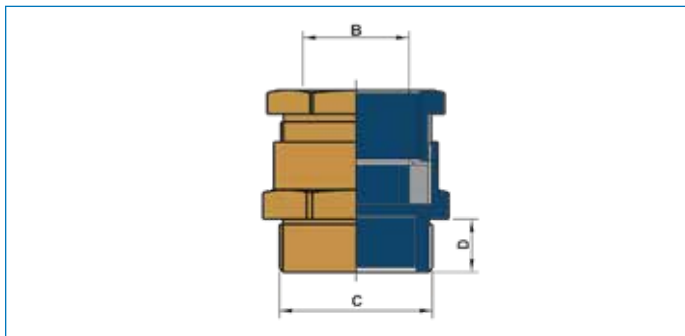

GENERAL FEATURES:

- * Threading norms; Metric EN 60423
NPT ANSI B1.20.1
GAS ISO 228
Pg DIN 46320
- * IP Protection class: IP 55 & IP 56
- * Standard Chloroprene Gaskets -40°C to +120°C,
- * Optional 316-316L stainless steel is also available.
- * It is of Standard Brass (MS-58) origin and nickel plating can also be made if desired.
- * Physical properties stated in the table have to be considered with $\pm 5\%$ tolerance.
- * If requested can be produced in any desired size or with a special thread length.

Usage Areas

Especially used in wet conditions (thanks to a covered gasket)



CERTIFICATES



OPTIONAL ACCESSORIES:

- * PVC Shroud,
- * Lock Nut,
- * Earth Tag,
- * IP Washer,
- * S. Steel Serrated Washer

BRASS METAL CABLE GLANDS

PRODUCT TYPE	NORMAL BRASS CABLE GLAND
PRODUCT CODE	NKR-..
MANUFACTURER	MSM
MATERIAL	MS-58 BRASS
COATING	OPTIONAL NICKEL



Metric Type Code	Metric Type Size	Clamping Range "B" min-max (mm)	Hole Diameter "C" (mm)	Thread Length "D" (mm)
NKR-M1	M12x1,5	3÷6	13,0	7,0
NKR-M2	M16x1,5	6÷9	17,0	7,0
NKR-M3	M20x1,5	8÷12	21,0	8,0
NKR-M4	M25x1,5	14÷19	26,0	8,0
NKR-M5	M32x1,5	18÷24	33,0	10,0
NKR-M6	M40x1,5	29÷35	41,0	12,0
NKR-M7	M50x1,5	35÷41	51,0	12,0
NKR-M8	M63x1,5	43÷49	64,0	12,0
NKR-M9	M75x1,5	55÷62	76,0	15,0
NKR-M10	M90x1,5	64÷72	91,0	15,0

Pg type Code	Pg type Size	Clamping Range "B" min-max (mm)	Hole Diameter "C" (mm)	Thread Length "D" (mm)
NKR-P1	Pg 7	3÷6	13,5	7,0
NKR-P2	Pg 9	6÷9	16,0	7,0
NKR-P3	Pg 11	6÷10	19,5	7,5
NKR-P4	Pg 13,5	8÷12	21,5	8,0
NKR-P5	Pg 16	10÷14	23,5	8,0
NKR-P6	Pg 21	14÷19	29,0	8,0
NKR-P7	Pg 29	23÷28	38,0	10,5
NKR-P8	Pg 36	28÷35	48,0	11,0
NKR-P9	Pg 42	35÷41	55,0	11,0
NKR-P10	Pg 48	39÷45	60,5	11,5