

RSC TYPE THREADED GALVANIZED STEEL CONDUIT ACCESSORIES

PRODUCT TYPE

90° - THREADED ELBOW

PRODUCT CODE

MR-541.H

MANUFACTURER


PRO-STAR

MATERIAL

GALVANIZED STEEL

COATING

HOT-DIP GALVANIZED

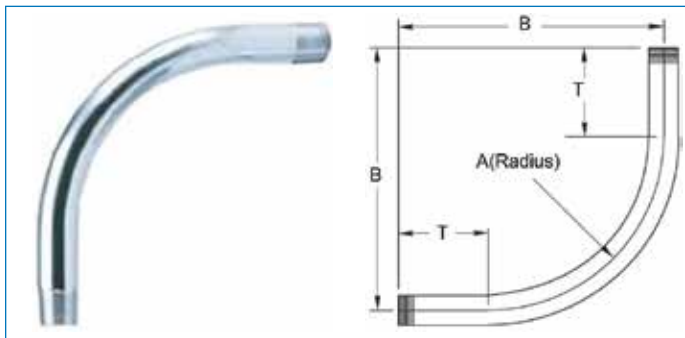

CERTIFICATES



MSM Code	Manufacturer's Code	Thread Size	Outer Dia. (mm)	Wall thickness (mm)	A Radius (mm)	B Length (mm)	T Tangent (mm)	Package Weight (kg)
MR-541.H	8344	1/2"	21,34	2,64	101,60	161,11	44,45	17,5
MR-542.H	8345	3/4"	26,67	2,72	114,30	172,24	57,15	25,0
MR-543.H	8346	1"	33,40	3,20	146,05	226,09	57,15	22,5
MR-544.H	8347	1 1/4"	42,16	3,38	184,15	260,35	76,2	29,0
MR-545.H	8348	1 1/2"	48,26	3,51	209,55	303,20	88,9	29,3
MR-546.H	8349	2"	60,33	3,71	241,30	356,39	101,6	30,0
MR-547.H	8350	2 1/2"	73,03	4,90	266,70	406,40	120,65	22,0
MR-548.H	8351	3"	88,90	5,21	330,20	481,25	152,4	17,3
MR-549.H	8353	4"	114,30	5,72	406,40	595,30	146,05	15,0
MR-550.H	8354	5"	141,30	6,20	-	-	-	23,5
MR-550.1.H	8355	6"	168,26	6,75	762,00	1168,15	279,4	38,0

Usage Areas

Used for 90° turns in RSC conduits.